

# Colenta<sup>®</sup> Imageline Plate<sup>®</sup>

**For AGFA SilverLithoStar CTP - Printing Plates**  
**IMAGELINE PLATE – TYPE ILP 68/85 LS**  
**(Available in both Offline and Online options**  
**for a wide range of Platesetters)**



The Colenta Lithostar Processors are well proven and fully endorsed/accredited by Agfa as meeting their high standards in plate quality, reliability and production specifications. A copy of the Agfa accreditation is available on request.

**The Agfa accreditation details the following features of the Colenta Lithostar design:**


- \* Approved for 300 / 75 sq/mt plates per day
- \* A Robust design with ease of operation.
- \* Fully compatible and adaptable „on-site“ to Concept 7 Lithostar Plate when available.
- \* A sophisticated Control software monitors and manages the varying range of production conditions in respect to replenishment requirements (including standby and sleepmode replenishment) ensuring a stable plate developer and consistent good quality production.



**Standard Features and accessories:**

- In-built Chiller unit
- Prepared for Integrated Stacker (Online model)
- Low Level monitoring of Dev, Wash, Rinse and Finisher Tank solutions.
- Automatic Solution Tank „Top-Up“ control on „Start-Up“
- High level monitoring in overflow collection tank (waste management)
- Low Level Replenishment Tank monitoring.
- Re-Wash Feed Facility
- „Safe Loading“ control
- „Work in Progress“ monitoring

COLENTA ILP 68-85 LS/OL

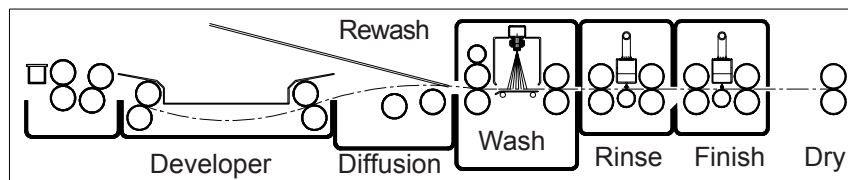

**Technical Specifications:**

**Processing applications:**

**Plate width:**

**Microprocessor Control:**

**Transport Speed at 20 sec DEV-Time:**  
**(Time in Dev. plus Diffusion Time 20sec:)**

AL-CTP AGFA SilverLithoStar  
 max. 68 / 85 cm  
 with 4 preprogrammable processing cycles  
 and 1 overnight program (SLEEPMODE)  
 170cm/min - 67 inch/min  
 preprogrammable 16 to 80 sec.  
 (recommended by AGFA 35sec/100cm/min)

	Tankcapacity ILP 68	Tankcapacity ILP 85	Temperature
Developer	12 lt	14,5 lt	15 - 45°C
Wash	11 lt	13,4 lt	18 - 55°C
Rinse	5 lt	5,9 lt	18 - 55°C
Finisher	5,5 lt	6,7 lt	18 - 55°C
Dryer	-	-	18 - 60°C
Electrical supply:	6KW	6KW	
at 3N-400/230V	13 A	13A	

(possible alternatives are available on request)


Weight:	Empty	350 kg	385 kg
	With solution	385 kg	425 kg



see additional  
 Data sheet:  
 G4-5 / G4-6

Technical specification subject  
 to change without notice.

A drawer unit within the main frame to house the replenishment and waste collection tanks.  
 (waste management)



Microprocessor  
 controlled Display

COLENTA LABORTECHNIK  
 Ges.m.b.H. & Co. KG  
 Neunkirchner Strasse 117  
 A-2700 Wiener Neustadt  
 Tel.: +43-2622-28311-0  
 Fax: +43-2622-28311-7  
 E-mail: [office@colenta.at](mailto:office@colenta.at)  
<http://www.colenta.at>

ACI-COLENTA  
 INTERNATIONAL Div.  
 Forge Close, Little End Rd,  
 Eaton Socon, Cambs. UK  
 Tel. +44-1480-211118  
 Fax:+44-1480-215236  
 Fax: +44/870/132 1352  
 E-mail: [aci@patflaherty.com](mailto:aci@patflaherty.com)